


Interlock atloks kods 62 un 45° leņķis 6000psi

Interlock flange code 62 45° elbow 6000psi

Фланец 45° код 62 6000psi

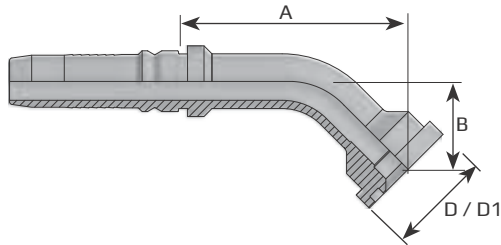

**INTERLOCK  
ATLOKS  
FLANGE  
ФЛАНЕЦ**

**bez blīvgumijas  
without O-ring  
без уплотнительного кольца**

| Kods<br>Code<br>Код | Šļūtene<br>Hose<br>Рукав |              |            | Vītne<br>Thread<br>Резьба | Izmēri<br>Dimensions<br>Размеры |          |         |         | Spiediens<br>Pressure<br>Давление |      |
|---------------------|--------------------------|--------------|------------|---------------------------|---------------------------------|----------|---------|---------|-----------------------------------|------|
|                     | D.N.                     | Hose<br>Inch | Diam<br>mm |                           | D<br>Inch                       | D1<br>mm | B<br>mm | A<br>mm | Bar                               | Psi  |
| <b>KF45P1212I</b>   | -12                      | 3/4"         | 19         |                           | 3/4"                            | 41.3     | 35      | 67.7    | 420                               | 6091 |
| <b>KF45P1216I</b>   | -12                      | 3/4"         | 19         |                           | 1"                              | 47.6     | 39      | 71.7    | 420                               | 6091 |
| <b>KF45P1612I</b>   | -16                      | 1"           | 25.4       |                           | 3/4"                            | 41.3     | 32      | 83.6    | 415                               | 6019 |
| <b>KF45P1616I</b>   | -16                      | 1"           | 25.4       |                           | 1"                              | 47.6     | 35      | 86.6    | 415                               | 6019 |
| <b>KF45P1620I</b>   | -16                      | 1"           | 25.4       |                           | 1.1/4"                          | 54       | 40      | 91.6    | 415                               | 6019 |
| <b>KF45P2020I</b>   | -20                      | 1.1/4"       | 31.8       |                           | 1.1/4"                          | 54       | 47      | 102.7   | 415                               | 6019 |
| <b>KF45P2024I</b>   | -20                      | 1.1/4"       | 31.8       |                           | 1.1/2"                          | 63.5     | 50      | 105.7   | 415                               | 6019 |
| <b>KF45P2424I</b>   | -24                      | 1.1/2"       | 38.1       |                           | 1.1/2"                          | 63.5     | 47      | 116.5   | 345                               | 5004 |
| <b>KF45P2432I</b>   | -24                      | 1.1/2"       | 38.1       |                           | 2"                              | 79.4     | 64      | 145     | 345                               | 5004 |
| <b>KF45P3232I</b>   | -32                      | 2"           | 50.8       |                           | 2"                              | 79.4     | 64      | 153     | 345                               | 5004 |